

# NOVA<sup>®</sup>

Twin wall insulated stainless steel multi fuel chimney system

MARKET LEADING

20  
YEAR

WARRANTY

Suitable for wood/multi-fuel burners, biomass, gas and oil condensing & non-condensing appliances.

## Features:

- Fully welded
- High level insulation
- High thermal resistance
- Rapid Twist-lock installation
- Distance to combustible 50mm

Diameters:	100mm - 600mm
Construction:	Twin wall
Insulation:	Mineral wool 25mm 250kg/m <sup>3</sup>
Liner:	Corrosion resistant 316L
Outer Casing:	304 stainless steel

## Flue Gas Temperatures:

T600\*, T450 T200 (with seals)  
\*refer to installation literature

## Pressure Capability:

40Pa (N1)

200Pa (P1) with seals

5000Pa (H1) with seals & diameter dependant

## Mode of Operation:

Negative/Dry Positive/Condensing (with seals)

## Approvals:

2-hour fire rating to BS476 part 20

BS EN 1856-1 T600 N1 D V2 L50050 G(50)

BS EN 1856-1 T450 N1 D V2 L50050 G(50)

\*BS EN 1856-1 T200 P1 W V2 L50050 O(50) \*\*

\*BS EN 1856-1 T160 H1 W V2 L50050 O(50) \*\*

Commercial Nova(>355mm)

BS EN 1856-1 T450 N1 D V2 L50060 O(50) \*\*

\*BS EN 1856-1 T120 P1 W V2 L50060 O(50) \*\*

\*with seals fitted

## Certification:




## Warranty:

20 Years

## Environment:

Internal & external

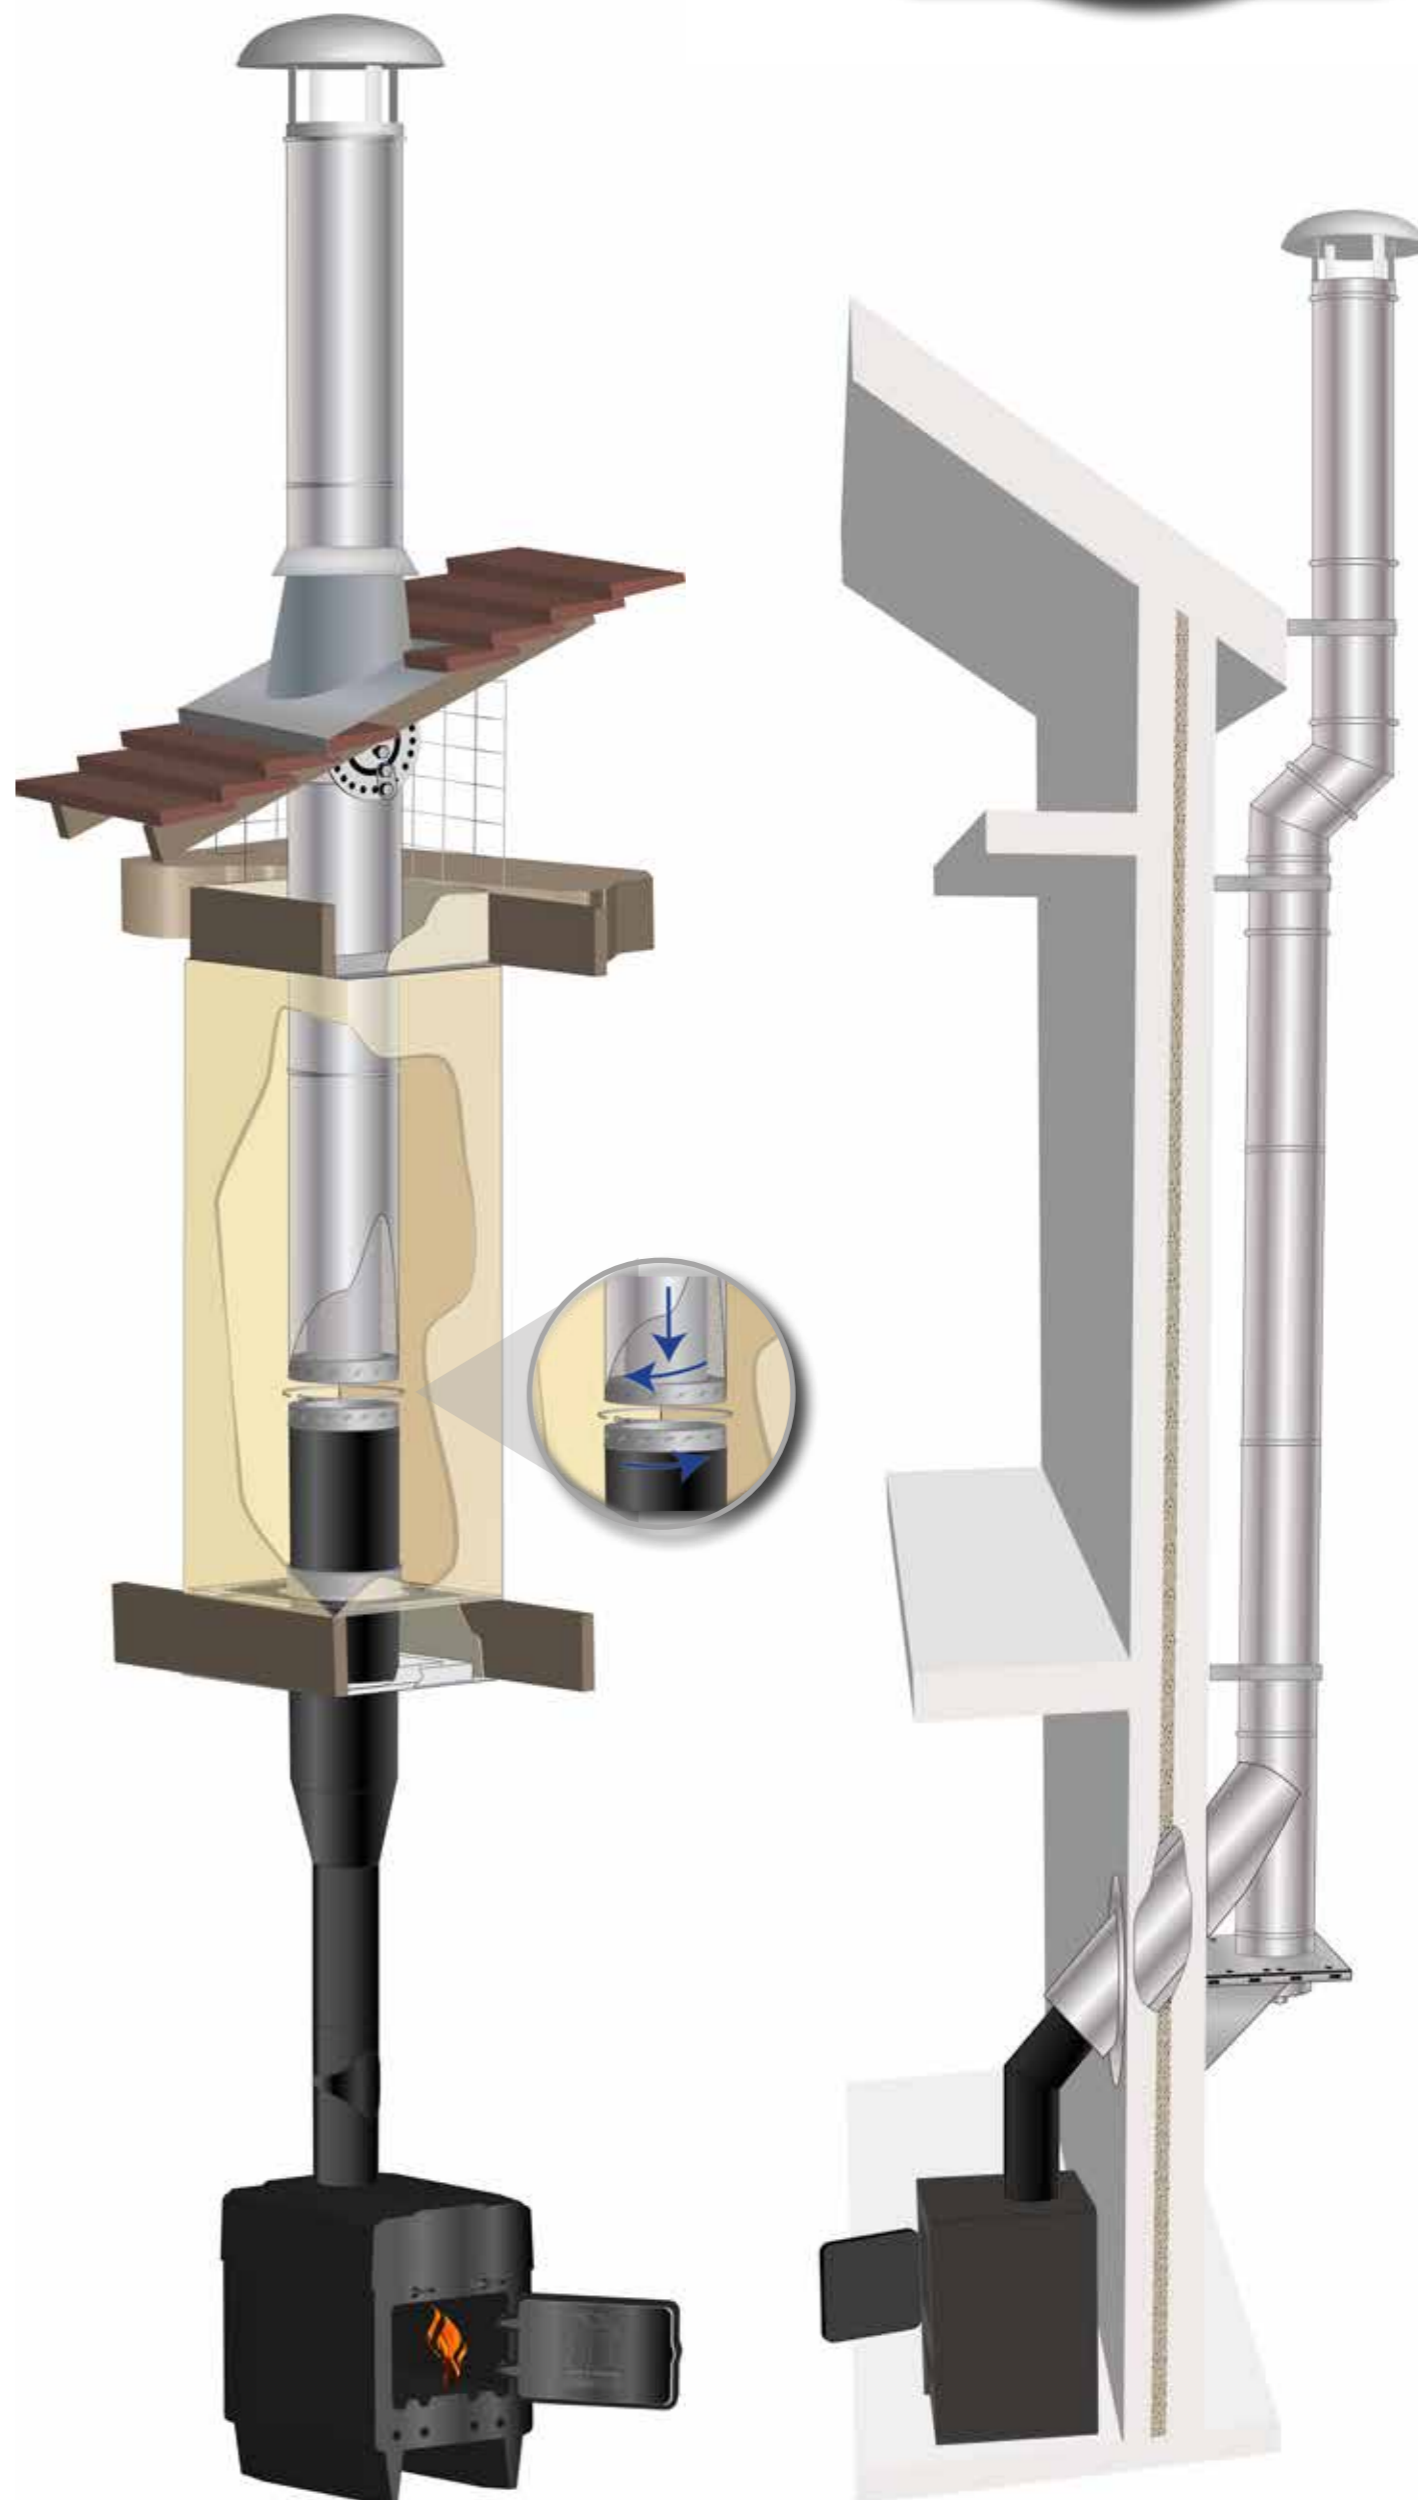

Also available in a Satin Black Finish

NOVA

STOVE  
Sflue

SUPRA<sup>Plus</sup>

EUROPA<sup>Plus</sup>

SIGMA

SW

IL

SFL<sup>®</sup>  
flues & chimneys