




# Flues and chimney systems


Complete systems overview

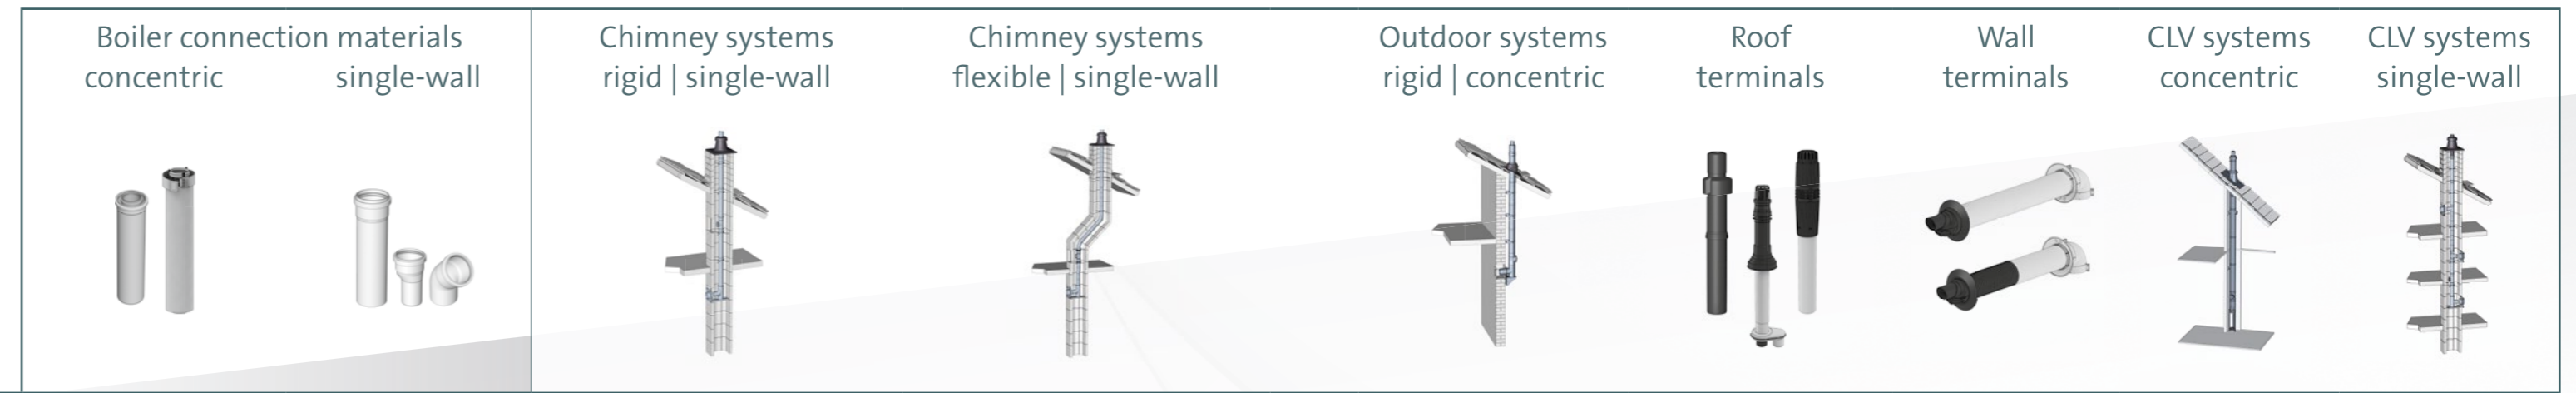

Configuration in boiler room (connection ducts)

	Boiler connection materials concentric	Boiler connection materials single-wall	Chimney systems rigid   single-wall	Chimney systems flexible   single-wall	Outdoor systems rigid   concentric	Roof terminals	Wall terminals	CLV systems concentric	CLV systems single-wall	
<b>Type C room-sealed</b>  The air supply, combustion chamber, heat exchanger and evacuation of exhaust gases (i.e. the combustion circuit) for this type of appliance is sealed with respect to the room in which the appliance is installed. The combustion air is taken from outside the installation room.		60/100 80/125 100/150 110/160	60, 80, 110, 125, 160, 200	<b>Type C9</b> 60, 80, 110, 125, 160, 200, 250, 315	<b>Type C9</b> 60, 80, 110, 125, 160	<b>Type C5 or C3</b> 60/100, 80/125, 110/160, 125/185, 160/225, 200/300, 250/350, 315/400	<b>Type C3</b> 60/100, 80/125, 100/150, 110/160	<b>Type C1</b> 60/100, 80/125, 100/150, 110/160	<b>Type C4</b> 80/130, 110/160, 125/200, 160/250, 200/300	<b>Type C10</b> 80, 110, 125, 160, 200
			60, 80, 110, 125, 160, 200, 250, 315	<b>Type C5</b> 60, 80, 110, 125, 160, 200, 250, 315	<b>Type C5</b> 60, 80, 110, 125, 160		<b>Type C5</b> 60/100, 80/125, 100/150, 110/160, 125/185, 160/225, 200/300, 250/350, 315/400			<b>Type C13</b> 80, 110, 125, 160, 200
		60/100, 80/125, 110/160	60, 80, 110, 125, 160, 200	<b>Type C5x</b> 60, 80, 110, 125, 160, 200, 250, 315	<b>Type C5x</b> 60, 80, 110, 125, 160					<b>Type C13</b> 80, 110, 125, 160, 200
		110/160		<b>Type C4</b> 60, 80, 110, 125, 160, 200, 250, 315	<b>Type C4</b> 60, 80, 110, 125, 160	<b>Type C4</b> 110/160, 125/185, 160/225, 200/300, 250/350, 315/400				
<b>Type B non-room-sealed</b>  Appliance is intended to be connected to a flue system that evacuates the flue gases to the outside of the room containing the appliance. The combustion air is taken from the installation room.		60/100, 80/125, 110/160	60, 80, 110, 125, 160, 200, 250, 315	<b>Type B3</b> 60, 80, 110, 125, 160, 200, 250, 315	<b>Type B3</b> 60, 80, 110, 125, 160	<b>Type B3</b> 110/160, 125/185, 160/225, 200/300, 250/350, 315/400				
			60, 80, 110, 125, 160, 200, 250, 315	<b>Type B2</b> 60, 80, 110, 125, 160, 200, 250, 315	<b>Type B2</b> 60, 80, 110, 125, 160	<b>Type B2</b> 60/100, 80/125, 110/160, 125/185, 160/225, 200/300, 250/350, 315/400	<b>Type B2</b> 110/160, 125/185, 160/225, 200/300, 250/350, 315/400	<b>Type B2</b> 60/100, 80/125, 100/150, 110/160		
			110, 125, 160, 200, 250, 315	<b>Type B2</b> 60, 80, 110, 125, 160, 200, 250, 315	<b>Type B2</b> 60, 80, 110, 125, 160	<b>Type B2</b> 110/160, 125/185, 160/225, 200/300, 250/350, 315/400	<b>Type B2</b> 110/160, 125/185, 160/225, 200/300, 250/350, 315/400	<b>Type B2</b> 80/125, 100/150, 110/160		

# Ubbink Centrotherm group

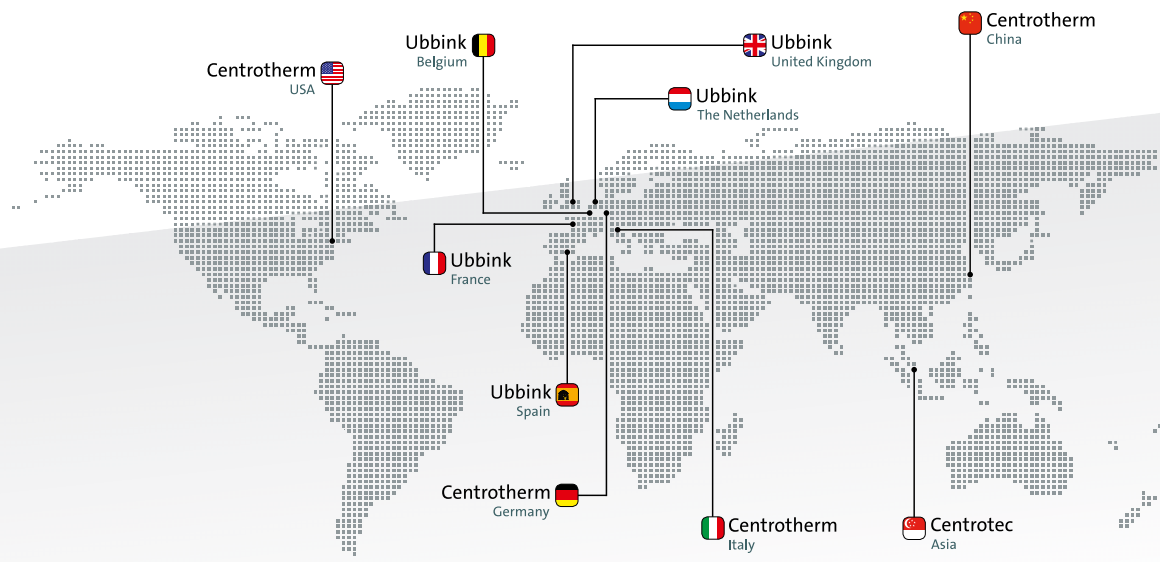

- Ubbink Netherlands** [www.ubbink.nl](http://www.ubbink.nl)
- Ubbink Belgium** [www.ubbink.be](http://www.ubbink.be)
- Ubbink France** [www.ubbink.fr](http://www.ubbink.fr)
- Ubbink Spain** [www.ubbink.es](http://www.ubbink.es)
- Ubbink United Kingdom** [www.ubbink.co.uk](http://www.ubbink.co.uk)
- Centrotherm Germany** [www.centrotherm.com](http://www.centrotherm.com)
- Centrotherm Italy** [www.centrotherm.it](http://www.centrotherm.it)
- Centrotherm U.S.A.** [www.centrotherm.us.com](http://www.centrotherm.us.com)
- Centrotherm China** [www.centrotherm-china.com](http://www.centrotherm-china.com)

[www.ubbink-centrotherm.com](http://www.ubbink-centrotherm.com)

